

Dingo Servo Mounts

Simplex Ver 2 control board (The Purple One)

Safety Precautions.

Note: All PCB's supplied in Anti-static bags for protection!

Before installing this product, make sure that you have read the full instruction guide and are comfortable with the requirements.


Make sure that all parts, especially plastic packets, are kept away from young children.

Only use certified power supplies for your region and **DO NOT** interfere with the Mains side of the power supply.

If you are unsure as to how to do the electrical connections, please consult with someone who has the required expertise or contact Dingo Servo Mounts for more information.

These units are not toys, but serious modelling parts.

Making sure you have the right board

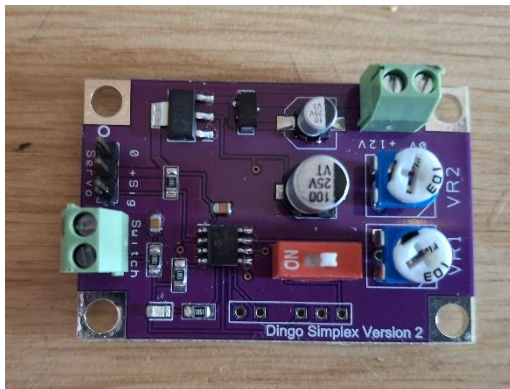

The board has a Purple resist printed on the board.

If all else fails connect 12V DC power to the board and if the LED is Red then you have the right Board.

Description and Origin

I believe there is a need for a very simple board that offers easy setup and operation for model railway points, uncouplers or crossing gates.

Our Red boards offer this but need a setting box to set them up.

For many who just want a single point controlled this leads to extra cost which is why this board does not need the setting box. This is the reason behind the development of this particular board.

The Simplex Ver 2 Control Board is designed for use with standard 9g servos like the FitecFS90, PowerHD 1900A or similar. The PowerHD1370A servos will also work. In fact, any of the servos sold by us. (Will not work with 360deg Servos) We do not recommend cheap SG90 clones

The Simplex Ver 2 Control Board has a preset speed to simulate real life movement and there is no provision for adjusting the speed.

The two end positions are set very simply by means the 2 pots on the board.

A simple single pole on/off switch is all that is required to move the servo from one position to the other.

Dingo Servo Mounts

Simplex Ver 2 control board (The Purple One)


Wiring up.

You will need a smoothed and regulated DC power supply of 9 – 12 V DC with a capacity of at least 1Amp for a single board.

A standard 2A wall wart will be sufficient to drive quite a few boards as long as not more than 2 are actuated at the same time.

You will also need a SPST switch to control your board. (This may also be a set of relay contacts or similar from your layout control panel.)

Note a push button switch will not work unless it is self-latching.

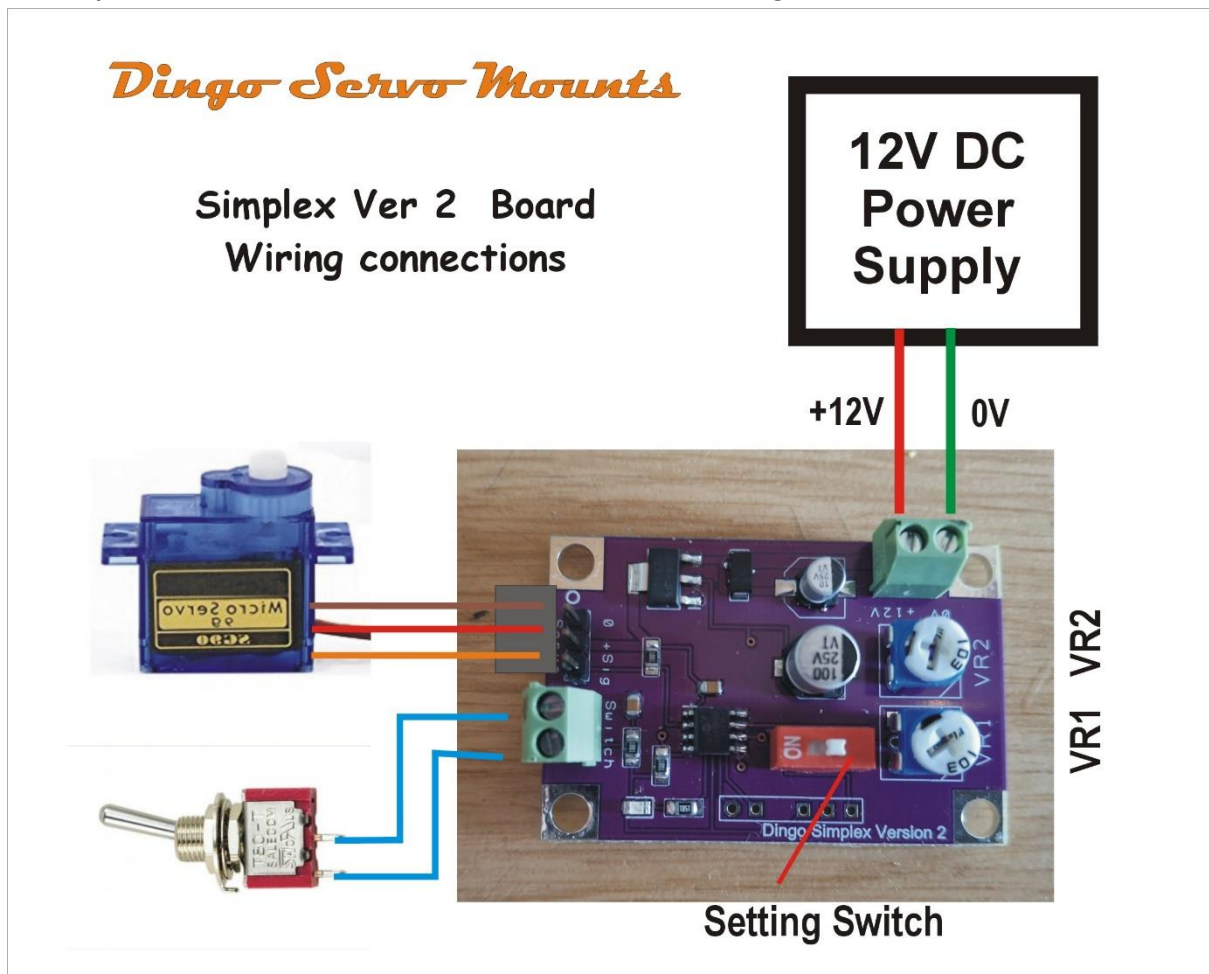

Wire up as per this diagram.

Note the polarity of the power supply is important. (If connected the wrong way around, the board will not work but will not be damaged).

The servo needs to be connected with the black or dark brown lead towards the top end of the board.

The switch simply shorts the two switch contacts together.

Note that the one nearest the servo plug is connected internally to earth. (0v)

The other pin is "live"

Boards are marked with black marker pen on the 0V terminals.

Dingo Servo Mounts

Simplex Ver 2 control board (The Purple One)

It is advisable to test the servo and board before fitting the servo to the layout.

We always recommend using one of our Dingo Servo Mounts to get optimum performance from your servo on your layout.

Setting up the end positions.

Once the unit is connected as described above, switch on the power and after a second or so the LED will light to show that the board is in working order.

Start with the operating switch in the open position.

Now move the setting switch on the board to "ON"

Immediately the LED will flash twice and the go out indicating that the board is now in setting mode.

Now adjust the board with VR2 until the position is set. (Use a small flat bladed screwdriver in the VR2 Pot)

Now operate the switch to the "CLOSED" position – the LED will come on momentarily and then go out.

Now set the other position by using VR1

Once this is done, switch the setting switch to the opposite side and the values will be written to the Chip.

The end positions are now set and the unit should operate when the switch is toggled.

At anytime the settings can be changed by switching the setting switch to "ON" again and repeating the above procedure.

ONE FINAL NOTE! Sometimes at switch-on the servos may move to the mid position before going back to the set positions. This is a software protection device to make sure that the servos don't go the wrong way with a bad switch on spike or bad shutdown. It is therefore important that the midpoint of travel is within the 2 set points of the servo.

I hope that you will find this unit useful and, as always, I welcome any feedback so that the boards deliver the best solution for your model railway

Dave Ingoldby

Mobile 07754901324

dingoservo@gmail.com

www.dingoservo.co.uk

If you haven't already seen our amazing servo mounts in action, please check out the Video Links Page on our website.

With grateful thanks to Fraser Smith for his help and input with the PIC Code.